

# Data Sheets





DECKING

# Decking Panels

**Sizes** 3100 x 1530 mm  
2500 x 1220 mm

**Gluing** Class 3 - E0  
Melamine adhesive  
Rubber inlays: no formaldehyde release  
Components Gluing E0

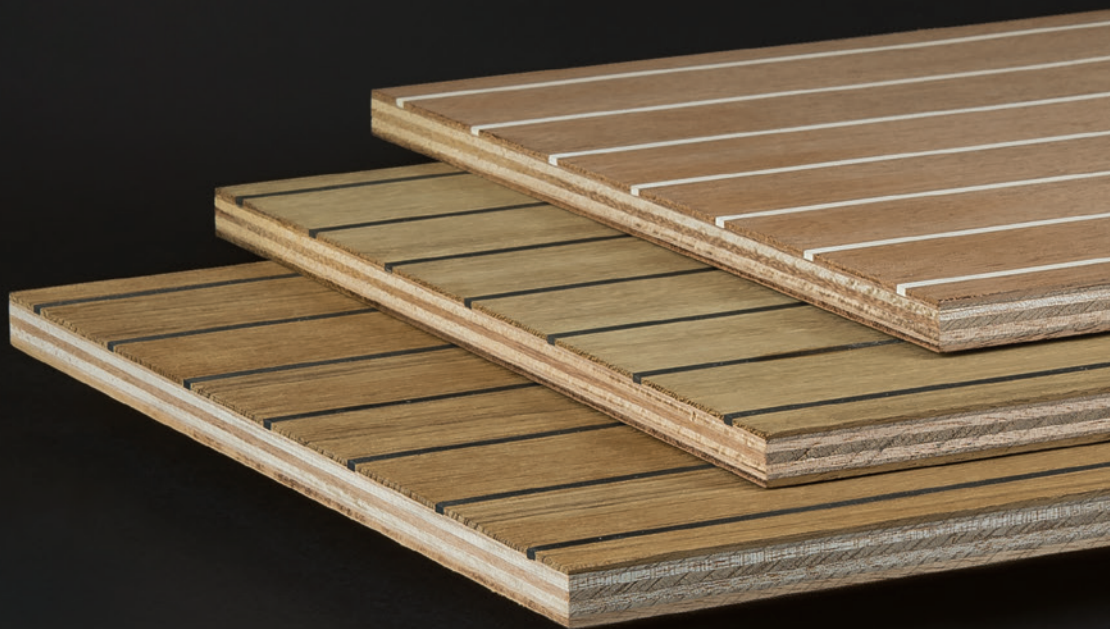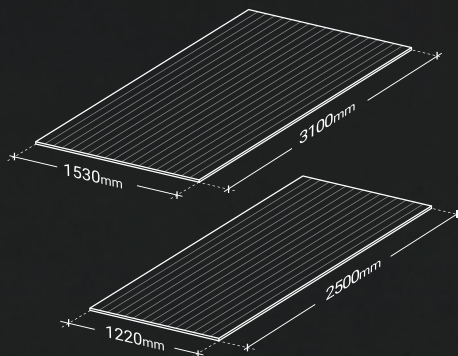

## TECHNICAL SPECIFICATIONS OF DECKING PANELS

### TEAK DECKING PANELS 1,0 mm

available with 1,0 mm, 1,5 mm and 2,6 mm veneer

Thickness	Plies	Weight
mm	n°	kg/m <sup>2</sup>
3	3	1,5
4	3	2,0
5	3	2,5
6	5	3,0
8	5	4,0
10	5	5,0
12	7	6,0
15	7	7,5
18	9	9,0
20	11	10,0

3 mm thickness is not available with 1,5 mm Teak veneer.  
3, 4, 5 mm thicknesses are not available with 2,6 mm Teak veneer.

### MAHOGANY DECKING PANELS 1,0 mm

available with 1,0 mm and 2,2 mm veneer

Thickness	Plies	Weight
mm	n°	kg/m <sup>2</sup>
3	3	1,5
4	3	2,0
5	3	2,6
6	5	3,1
8	5	4,1
10	5	5,1
12	7	6,1
15	7	7,7
18	9	9,2
20	11	10,2

3, 4, 5 mm thicknesses are not available with 2,2 mm Mahogany veneer.

### IROKO DECKING PANELS 2,2 mm

Thickness	Plies	Weight
mm	n°	kg/m <sup>2</sup>
6	3	2,9
8	5	3,9
10	5	4,9
12	7	5,9
15	7	7,4
18	9	8,8
20	11	9,8

Dimensional tolerances comply with the requirements of standard EN 315.  
Customized thicknesses and configurations upon request.

NOTES

A series of horizontal dotted lines intended for taking notes.