

Dati Tecnici




COMPENSATO MARINO

Okoumè RINA

Misure 3100 x 1530 mm
2500 x 1220 mm

Peso 500 kg/m³ (standard)
520 kg/m³ (lamellare)

Incollaggio Classe 3 - E0, norma EN 314-1:2004
Colla melaminica e fenolica

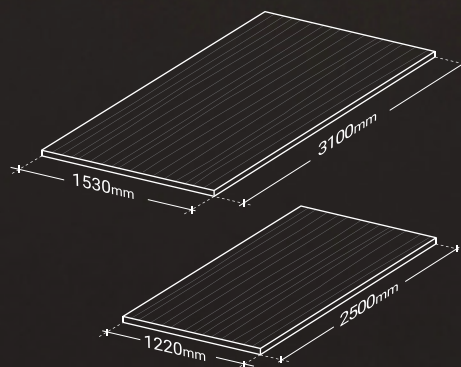

SPECIFICHE DIMENSIONALI E PESI COMPENSATO MARINO OKOUMÈ RINA

STANDARD

Spessore	Strati	Peso
mm	n°	kg/m²
1,5	3	0,8
2,5	3	1,3
3	3	1,5
4	3	2,0
5	3	2,5
6	4	3,0
8	5	4,0
10	5	5,0
12	7	6,0
15	7	7,5
18	9	9,0
19	9	9,5
20	9	10,0
22	11	11,0
25	11	12,5
30	13	15,0
40	17	20,0

LAMELLARE

Spessore	Strati	Peso
mm	n°	kg/m²
6	5	3,1
10	7	5,2
12	9	6,2
15	9	7,8
18	11	9,4
20	11	10,4
22	13	11,4
25	15	12,5
30	17	15,6

Spessore	Strati	Resistenza alla flessione		Modulo elastico	
		N/mm²		N/mm²	
		long.	trasv.	long.	trasv.
10	5	46,0	32,0	6800	4000
15	7	43,0	29,0	6200	3600

È possibile realizzare spessori e composizioni personalizzate in base alle esigenze progettuali. Le tolleranze dimensionali rispettano gli standard previsti dalla norma EN 315.



Conduttività termica

UNI 7745

}

0,16

W/mK

NOTE