

SPECIALITY PANELS

FurniLite™


Superlight panel highly valued in the production of furniture, furniture parts, doors and cabinet doors for which flatness is required.

Sizes 1530 x 3120 mm
1220 x 2520 mm

Weight From 336 kg/m³

Glueing Class E1
Melamine adhesive

NAF glueing upon request*

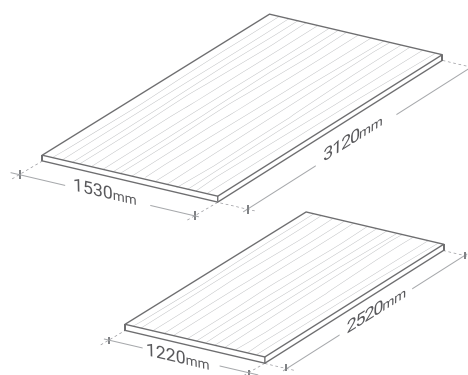

TECHNICAL SPECIFICATIONS OF FURNILITE™

Thickness mm	Weight kg/m ²	Bending Strength		Screw Pull-out Strength daN
		Long Grain.	Cross grain.	
14	4,87			
16	5,5	29,5	4860	93
19	6,55	34,0	6670	108
24	8,06			
30	10,28			

Dimensional tolerances comply with the requirements of standard EN 315. Customized thicknesses and configurations upon request.

© Nord Compensati Srl - via E. Torricelli, 44 - 20851 Lissone (MB) - Italy

FurniLite™ Okoumè Dr

The version with rotary cut Okoumè faces.

Sizes 1530 x 3120 mm
1220 x 2520 mm

Weight From 387 kg/m³

Glueing Class E1
Melamine adhesive

NAF glueing upon request*

TECHNICAL SPECIFICATIONS OF FURNILITE™ OKOUMÈ DR

Thickness	Weight
mm	kg/m ²
14	5,67
16	6,3
19	7,35

FurniLite™ Okoumè Ply

The version with faces made of 3 mm Okoume plywood.

Advantages: exceptional rigidity and maximum resistance to screw tightness.

Sizes 3080 x 1510 mm
2480 x 1200 mm

Weight From 408 kg/m³

Glueing Class E1
Melamine adhesive

NAF glueing upon request*

TECHNICAL SPECIFICATIONS OF FURNILITE™ OKOUMÈ PLY

Thickness	Weight
mm	kg/m ²
16	6,7
18	7,5
20	8,2
25	10,5

*Formaldehyde-free adhesive ensuring emission levels significantly below standard requirements.

Dimensional tolerances comply with the requirements of standard EN 315. Customized thicknesses and configurations upon request.

© Nord Compensati Srl - via E. Torricelli, 44 - 20851 Lissone (MB) - Italy

FurniLite™ MDF Hydro

The version with medium-density fiberboard, water-resistant faces.

Advantages: it is ideal for being painted and for joinery work.

Sizes 2440 x 1860 mm
2440 x 1090 mm

Weight From 486 kg/m³

Glueing Class E1
Melamine adhesive

NAF glueing upon request*

TECHNICAL SPECIFICATIONS OF FURNILITE™ MDF HYDRO

Thickness	Weight
mm	kg/m ²
16	8,1
18	8,9
20	9,7
25	13,1



*Formaldehyde-free adhesive ensuring emission levels significantly below standard requirements.

Dimensional tolerances comply with the requirements of standard EN 315. Customized thicknesses and configurations upon request.

© Nord Compensati Srl - via E. Torricelli, 44 - 20851 Lissone (MB) - Italy