
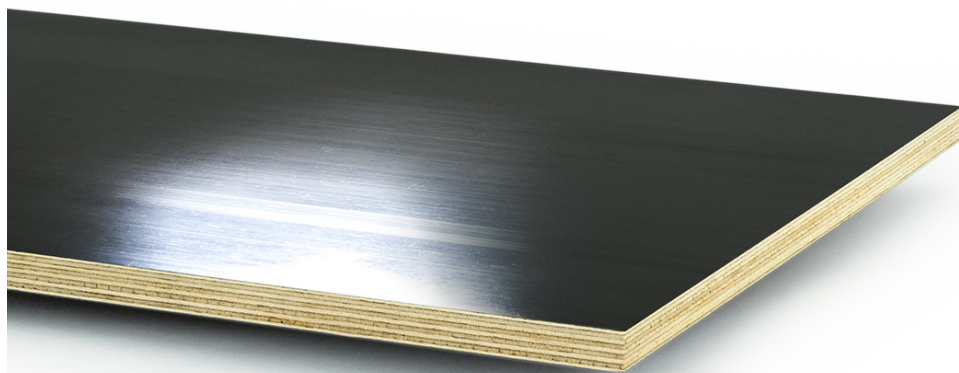


MARINE PLYWOOD

Phenolic coated

Phenolic coated Birch Plywood, also known as resin coated plywood, offers marine-grade properties thanks to phenolic bonding.

Sizes	1525 x 2500 mm
Weight	700 kg/m ³
Glueing	Class 3 Phenolic adhesive E05

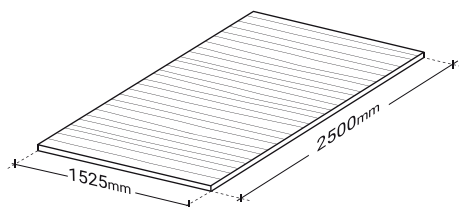

TECHNICAL SPECIFICATIONS OF PHENOLIC COATED MARINE PLYWOOD

Thickness	Plies	Weight	Bending Strength		Bending Modulus	
mm	n°	kg/m²	N/mm²		N/mm²	
			Long Grain	Cross Grain.	Long Grain	Cross Grain
12	9	8,4	70,0	60,0	7000	6500
15	11	10,5	65,0	60,0	7600	6600
18	13	12,6	60,0	55,0	8000	8300

Dimensional tolerances comply with the requirements of standard EN 315. Customized thicknesses and configurations upon request.



Thermal conductivity

UNI 7745

}

0,17 W/mK