

SPECIALITY PANELS

FurniLite™

Superlight panel highly valued in the production of furniture, furniture parts, doors and cabinet doors for which flatness is required.


- Sizes

1530 x 3120 mm
1220 x 2520 mm
- Weight

From 336 kg/m3
- Glueing

Melamine adhesive E05

NAF glueing upon request*

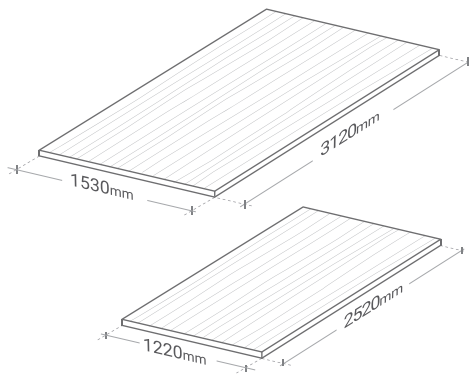

TECHNICAL SPECIFICATIONS OF FURNILITE™

Thickness	Weight	Bending Strength		Screw Pull-out Strength
mm	kg/m²	N/mm²		daN
		Long Grain.	Cross grain.	
14	4,87			
16	5,5	29,5	4860	93
19	6,55	34,0	6670	108
24	8,06			
30	10,28			

Dimensional tolerances comply with the requirements of standard EN 315. Customized thicknesses and configurations upon request.

FurniLite™ Okoumè Dr

The version with rotary cut Okoumè faces.

Sizes	1530 x 3120 mm 1220 x 2520 mm
Weight	From 387 kg/m3
Glueing	Class E1 Melamine adhesive NAF glueing upon request*

TECHNICAL SPECIFICATIONS OF FURNILITE™ OKOUMÈ DR	
Thickness	Weight
mm	kg/m²
14	5,67
16	6,3
19	7,35

FurniLite™ Okoumè Ply

The version with faces made of 3 mm Okoume plywood.
Advantages: exceptional rigidity and maximum resistance to screw tightness.

Sizes	3080 x 1510 mm 2480 x 1200 mm
Weight	From 408 kg/m3
Glueing	Class E1 Melamine adhesive NAF glueing upon request*

TECHNICAL SPECIFICATIONS OF FURNILITE™ OKOUMÈ PLY	
Thickness	Weight
mm	kg/m²
16	6,7
18	7,5
20	8,2
25	10,5

*Formaldehyde-free adhesive ensuring emission levels significantly below standard requirements.

FurniLite™ MDF Hydro

The version with medium-density fiberboard, water-resistant faces.
Advantages: it is ideal for being painted and for joinery work.

Sizes	2440 x 1860 mm
	2440 x 1090 mm
Weight	From 486 kg/m3
Glueing	Class E1
	Melamine adhesive
	NAF glueing upon request*

TECHNICAL SPECIFICATIONS OF FURNILITE™ MDF HYDRO

Thickness	Weight
mm	kg/m ²
16	8,1
18	8,9
20	9,7
25	13,1



*Formaldehyde-free adhesive ensuring emission levels significantly below standard requirements.

Dimensional tolerances comply with the requirements of standard EN 315. Customized thicknesses and configurations upon request.